

MP-1.5NPT-GSA

(150lb. WLL)

GIMBALLED STRUT ADAPTER

STRUTWARE™



CEILING MOUNT

Use Adaptive's gimballed strut attachment to suspend loudspeakers, video displays and other objects from Unistrut when attached to angled ceiling and roof structures, up to 90 degrees off vertical. This adapter mounts quickly and permanently to Unistrut channel with 1/2-13 spring loaded nuts (not included) or can be bolted through the strut when space permits. This SwivelMount suspends and locks objects weighing up to 150 lb using standard 1- 1/2" diameter steel pipe.



Mounts to overhangs



Secures to Unistrut



BC-GSA-100 (optional)
Use to attach to glulam

STANDARD FEATURES:

- ▶ For overhead audio & video applications.
- ▶ Adapts to standard off-the-shelf schedule 1-1/2" NPT and NPS threaded steel pipe

OPTIONAL ACCESSORIES:

- ▶ See Threaded Rod Datasheet
- ▶ Glulam Wood Beam Attachment - **BC-GSA-100**

SPECIFICATIONS:

Materials: Structural Steel
Finish: Powder Coat
Color: Black
Design Factor: 7:1
WLL: 150lbs
Shipping Weight: 6.5lb/3kg

PACKAGE CONTENTS:

1 pc Gimballed Strut Adapter
2 pcs 3/8" Flat Washer
1 pc Instruction Sheet
2 pcs 2 pcs Flange bolt 1/2-13x2"
2 pcs Retainer nut, 1/2-13
2 pcs Nyloc Nut, 1/2-13

MATES WITH:

[PIPE-1.5NPS-06](#), [PIPE-1.5NPS-12](#),
[PIPE-1.5NPS-18](#), [PIPE-1.5NPS-24](#),
[PIPE-1.5NPS-30](#), [PIPE-1.5NPS-36](#),
[PIPE-1.5NPS-48](#)

DIMENSIONS:




MP-500NPT-GTA

TOP VIEW

SIDE VIEW

OPTIONAL GLULAM BRACKETS

BC-GSA-100

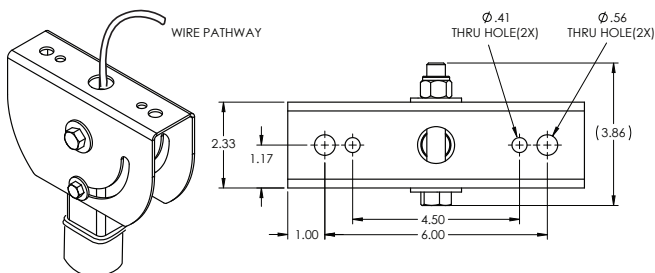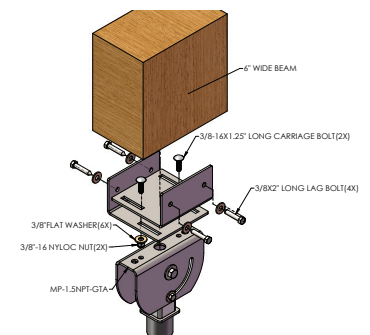

Adaptive Technologies Group
1635 E. Burnett Street | Signal Hill, CA 90755 USA
Ph: 562.424.1100 | Fax: 562.424.3520
www.adaptivetechnologiesgroup.com



ALWAYS INSTALL SAFETY CABLES

WARNING: Mounting and/or suspension of audio and video equipment requires experienced professionals. Improperly installed loudspeakers can result in property damage, personal injury and/or liability to the installing contractor.

